




Combination arrester V50

Surge protection energy technology, arrester, type 1+2

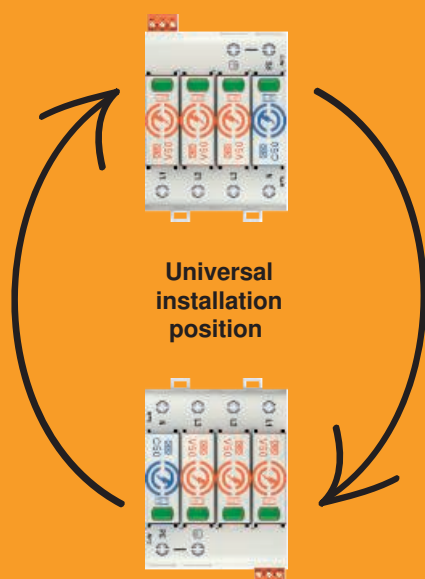

- Type 1+2 SPD: $I_{imp} = 12.5 \text{ kA}$ per pole and up to 50 kA in total
- Usable in buildings with lightning protection class III + IV
- Protection level: $< 1.5 \text{ kV}$, usable in coordination with type 3 SPD
- Quality according to EN 61643-11 certified by an external testing institute
- Universally usable for offices, commercial and residential buildings
- Can be installed universally through 90° labelling
- Usable for system protection up to 160 A without separate fusing
- Locking function with vibration protection
- Optional remote signalling, potential-free changeover (RS)
- Variants in one to four-pole versions
- Operating instructions always available online via QR code