




# Surge arrester V20

Surge protection energy technology, type 2 arrester

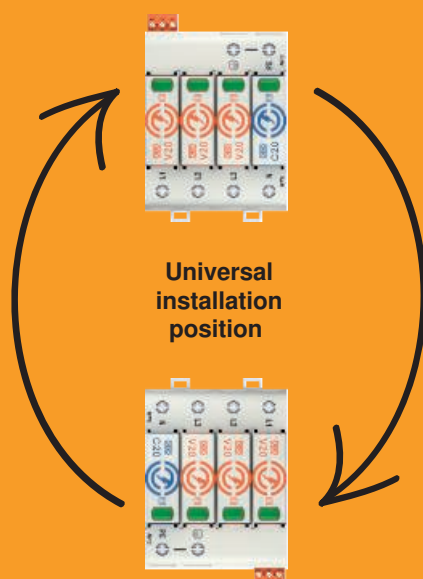

- Type 2 SPD:  $I_n = 20 \text{ kA (L-N) / 40 kA (N-PE)}$ , up to 60 kA
- Protection level:  $< 1.5 \text{ kV}$ , usable in coordination with type 3 SPD
- Exceeds the increased requirements according to VDE 0100-443
- Quality according to EN 61643-11 certified by an external testing institute
- Universally usable for industry, offices, commercial and residential buildings
- Locking function with vibration protection
- Usable for system protection up to 160 A without separate fusing
- Can be installed universally through 90° labelling
- Optional remote signalling, potential-free changeover (RS)
- Variants in one to four-pole versions
- Operating instructions always available online via QR code